

AG DUTY ULTRA-VEYOR



WALINGA®
TOUGH TO BEAT IN THE LONG RUN



LEADERS IN PNEUMATIC CONVEYING SYSTEMS

Walinga products are ripe with innovative solutions. When you engage with Walinga, your relationship extends beyond the simple purchase of a Walinga product. Walinga not only listens to their customers, they engage in conversation.

DID YOU KNOW?

Many standard features start out as customer initiated design projects. Throughout the year Walinga engineers review and collect customer feedback. Sometimes customers only outline a opportunity for improvement, some might offer the bones of a solution and occasionally one will go as far as sharing something specific they've fabricated for themselves. Each year Walinga engineers build a full size working prototype incorporating the best of these ideas and annually invite customers to come play with it. Changes might be made, some features may not prove worthy, but ideas that work will become standard production items.

THE WALINGA ULTRA-VEYOR

is the ultimate system for your grain transferring needs. This system moves grain by air, maximizing accessibility for any drying or storage facility. Move your grain safer and easier, without elevator legs or portable augers. Move your grain with minimal maintenance, with all the working components on the ground!

Walinga Ultra-Veyors can handle the requirements of most operations with models ranging from 400 bu/hr to 2100 bu/hr. These systems are flexible, expandable and easy to install.

***Ask any WALINGA customer
and they'll tell you
"Invest in a WALINGA, the
farm hand you can trust!"***




YOUR ULTIMATE BULK TRANSFER SYSTEM

WALINGA®

YOUR ULTRA-VEYOR GROWS AS YOU GROW

It's always nice to plan ahead and avoid expensive upgrades. The Walinga Ultra-Veyor system is so flexible, easy to install or retro-fit that you can add to your system as your business grows. Choose from an extensive selection of options and specifications to perfectly match your current business demands and keep those hard earned dollars in your pocket.

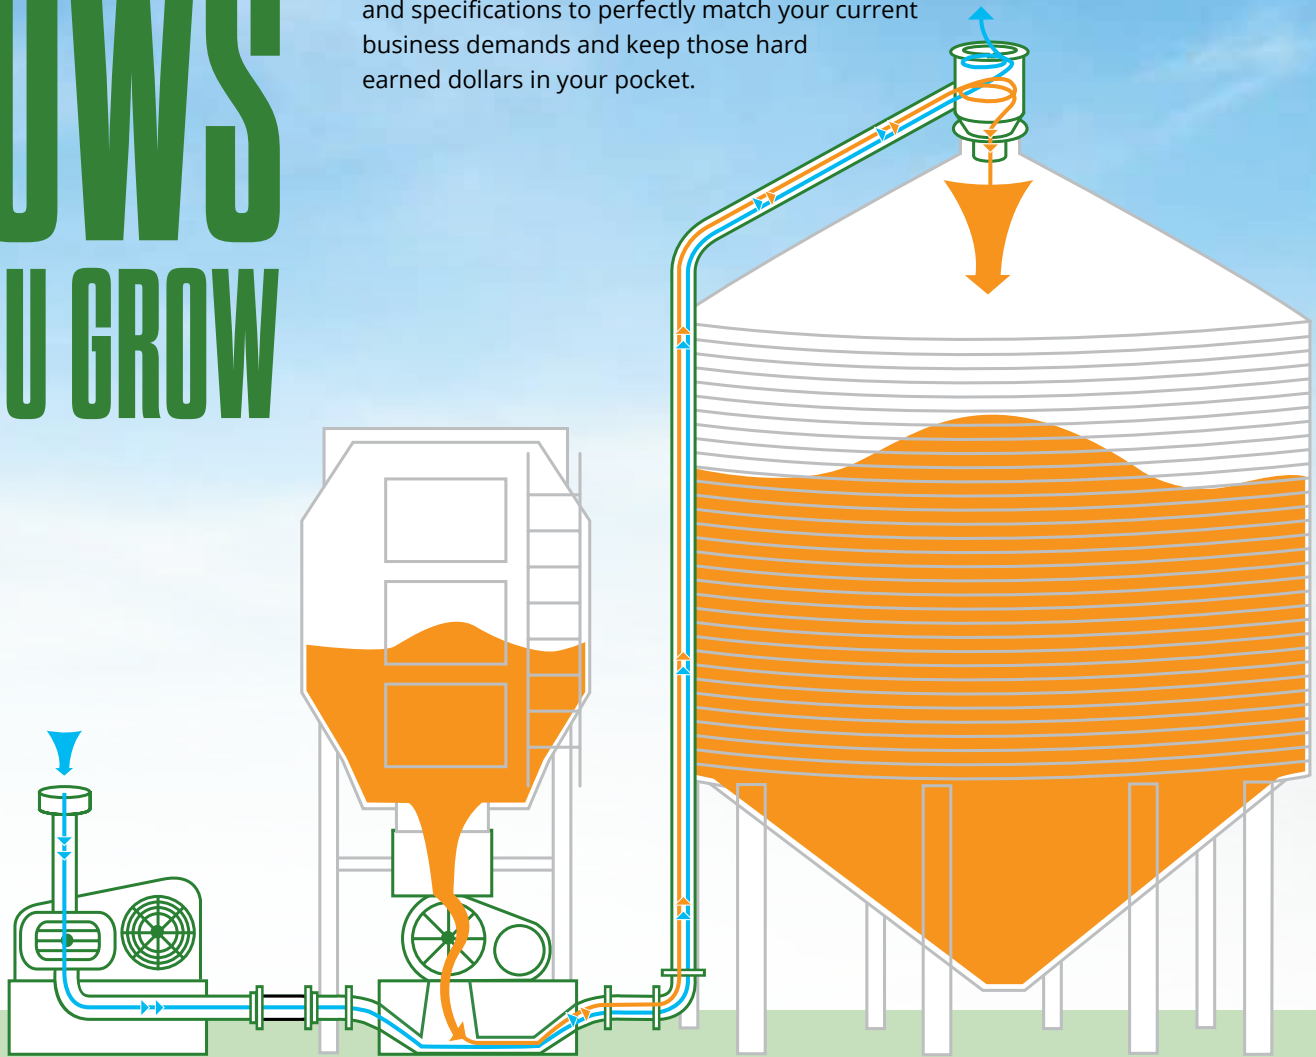

ACCESSORIES

Smart-Flo™
Automatic Air
Speed Controller



Airlock Outlet Adapter



Large Radius
Heavy Duty Elbows

Muffler / Silencer



Weather Proof
Bin Cyclone

Piping Accessories



Smart-Flo™

Smart-Flo™ Variable Frequency Drive Systems monitor and automatically adjust motor speeds, optimizing performance while reducing energy costs and bulk damage.


- Reduces product damage
- Equipped with a sensor and PLC that continually monitor the system, adjusting air speeds to maximize transfer capacity

Smart-Flo™

Control Panel



- Automatically adjusts blower speeds to maintain bulk integrity and reduce energy costs
- Can be customized to be installed with any common programmable VFD
- Completely self-contained system that can be run independent of an input system such as a grain dryer

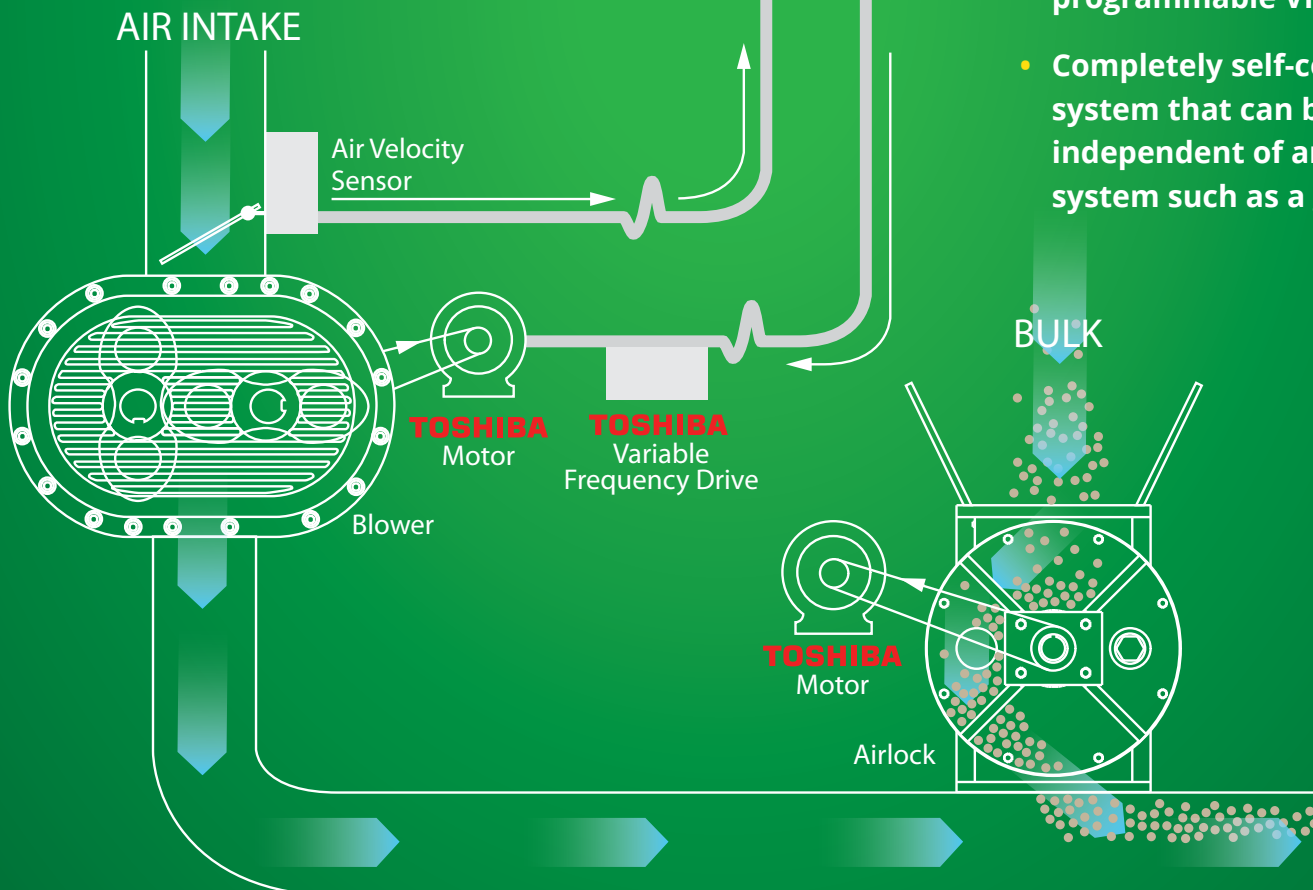

YOUR ULTIMATE BULK TRANSFER SYSTEM

WALINGA®

CUSTOM SPECIFY YOUR ULTIMATE BULK TRANSFER SYSTEM

Design your own or ask the experts at Walinga to create the perfect solution for your new or retro-fit installation. Walinga offers all the options imaginable to improve your bulk transferring needs.

It doesn't stop there, don't be afraid to ask for what you don't see, our CAD manufacturing process facilities prompt one-off solutions.


SAFETY

The Ultra-Veyor moves bulk product virtually dust and damage free without the use of heavy augers or booms. Maintenance is performed easily at ground level with simple access to all filters, belts and lubrication points.

CYCLONES VIRTUALLY
ELIMINATE STORAGE BIN DUST

CHOOSE FROM A WIDE
SELECTION OF STOCKED
CUSTOM FITTINGS


One Piece Unit

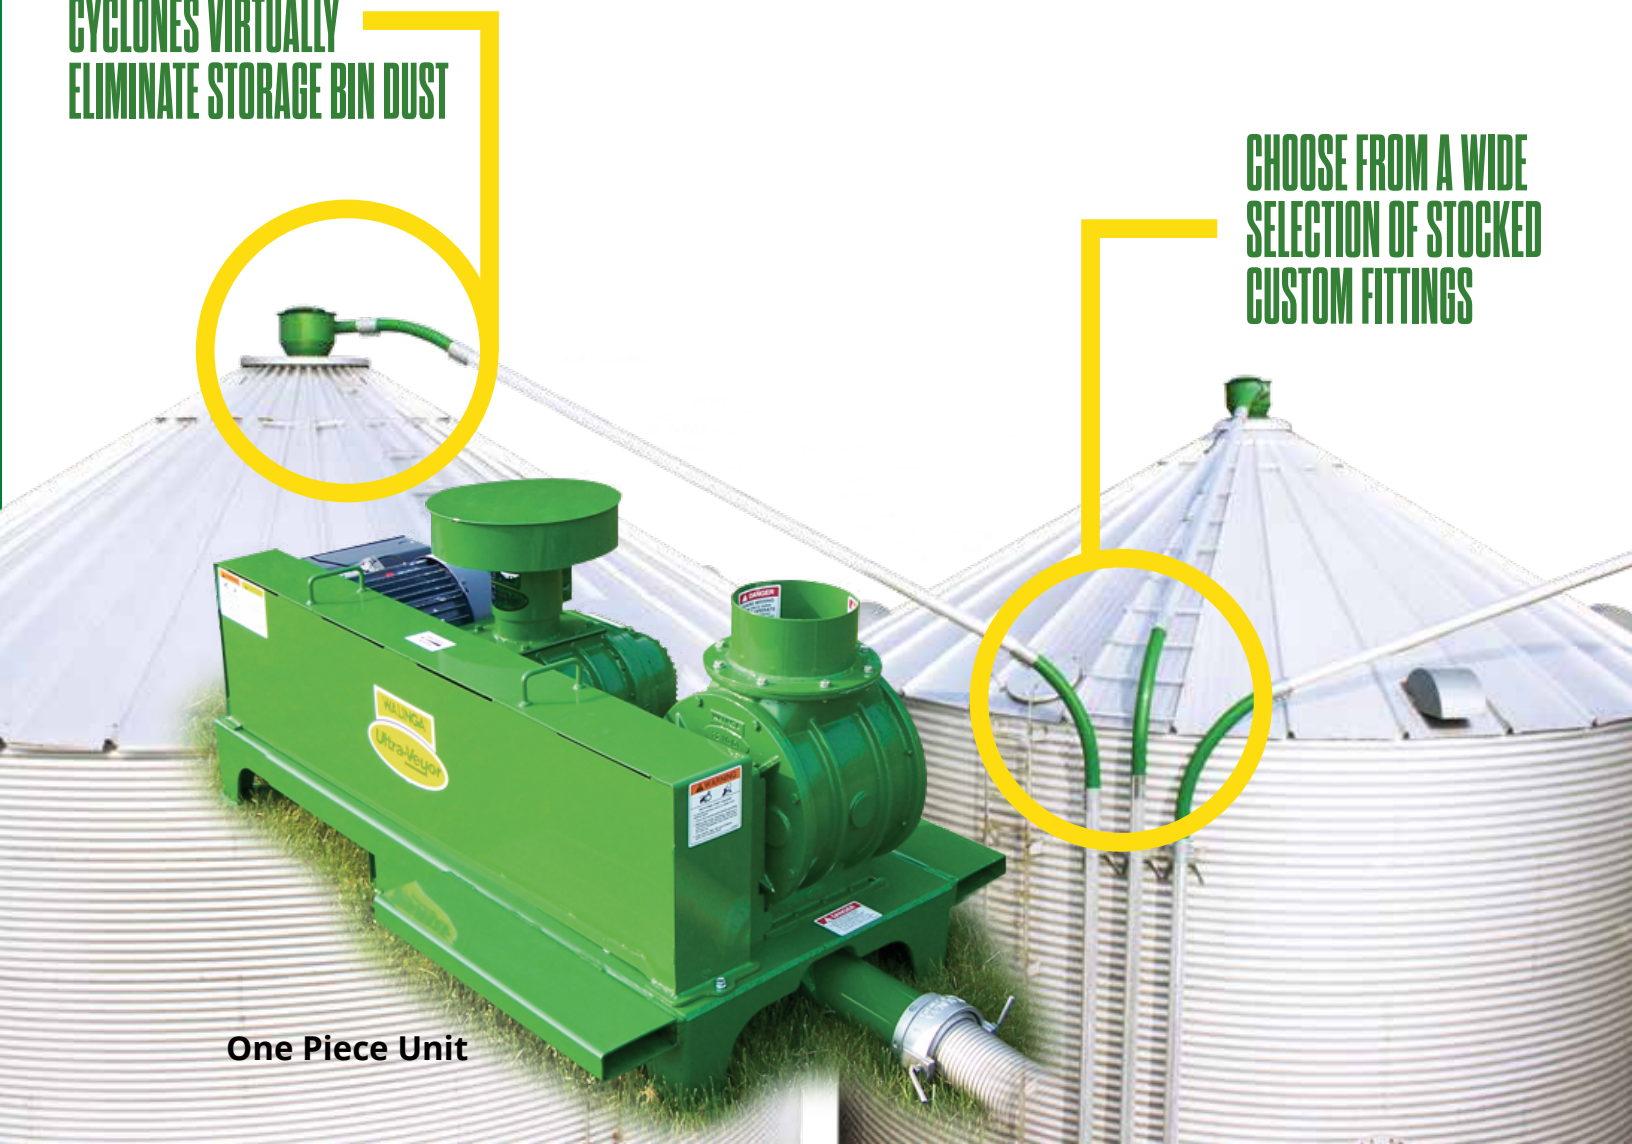

Blower Package WEIGHT & DIMENSIONAL SPECIFICATIONS


MODEL	A	B	C	D	E	Weight
510 (4")	31 - 1/2"	34 - 3/4"	53 - 1/8"	31 - 1/2"	4"	985 lbs
510 (5")	31 - 1/2"	34 - 3/4"	53 - 1/8"	31 - 1/2"	5"	995 lbs
614 (5")	32 - 3/8"	51 - 1/4"	54"	32"	5"	1325 lbs
614 (6")	32 - 3/8"	51 - 1/4"	54"	32"	6"	1335 lbs

Base model shown, other options may result in changes to size and weight.

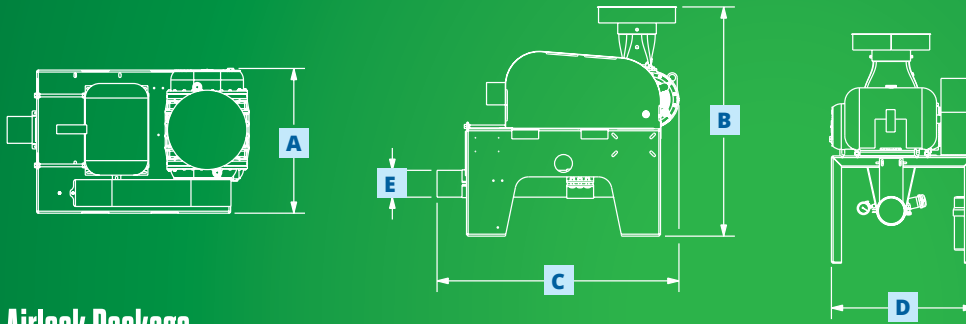

WALINGA SUPER HARDENED SRT BLOWER


Experienced in the manufacturing of feed and grain handling equipment, Walinga is first for quality. Walinga blowers are fabricated from special alloy castings that facilitate hardening. Walinga's proprietary super hardening process out-performs chrome hardened finishes. The hardening process eliminates premature wear from abrasive dust, ensuring a much longer life than unhardened blowers.



Airlock Package WEIGHT & DIMENSIONAL SPECIFICATIONS

MODEL	A	B	C	D	E	F	Weight
1210 (4")	22 - 1/16"	29 - 1/8"	34 - 1/2"	27"	4"	8"	450 lbs
1210 (5")	22 - 1/16"	29 - 1/8"	34 - 1/2"	27"	5"	8"	450 lbs
1314 (4")	23 - 3/4"	25 - 3/4"	65 - 1/4"	17"	4"	8"	660 lbs
1314 (5")	23 - 3/4"	25 - 3/4"	65 - 1/4"	17"	5"	8"	660 lbs
1618 (6")	28 - 1/2"	29 - 3/8"	79 - 1/2"	27"	6"	10"	940 lbs
2018 (7")	28 - 1/2"	29 - 3/8"	79 - 1/2"	27"	7"	10"	940 lbs

Base model shown, other options may result in changes to size and weight.

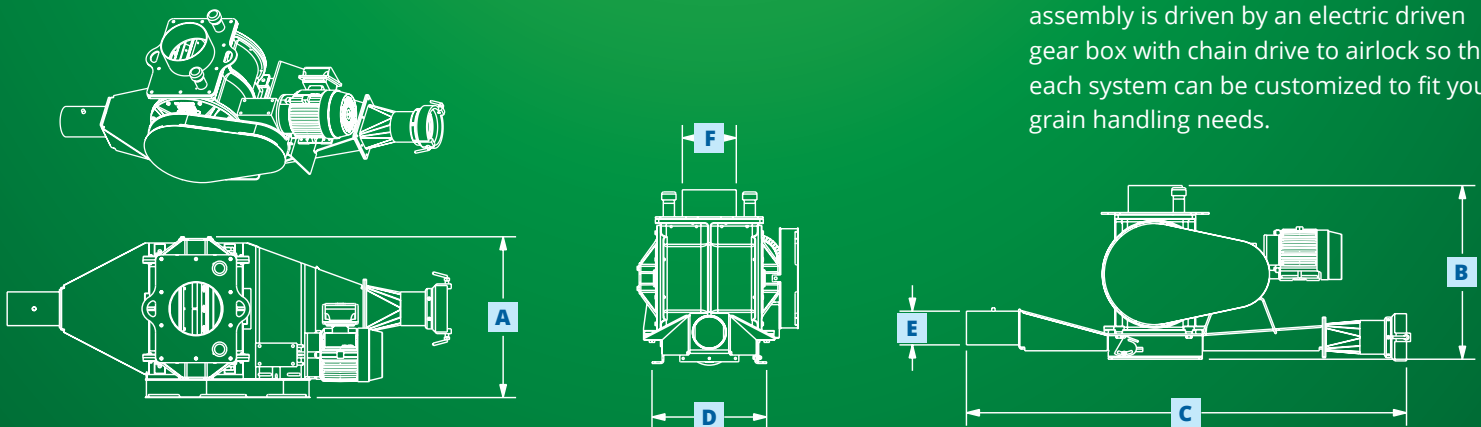



THE WALINGA DROP THRU AIRLOCK

Designed for maximum efficiency and minimal grain damage the housing is precision machined from a cast iron shell for unequalled performance. The 10 vane fabricated steel rotor has hardox steel adjustable tips for longer life. Walinga's latest innovations include the modification of the inlet and outlet ports with flow contours for maximum capacity. To minimize grain damage, a special rotor wiper levels the pockets. The entire assembly is driven by an electric driven gear box with chain drive to airlock so that each system can be customized to fit your grain handling needs.

BLOWER DISPLACEMENT & CAPACITY SPECIFICATIONS

WALINGA®

BLOWER DISPLACEMENTS

Size	Disp. (c.f.r)	Press Diff. (p.s.i)	Speed (r.p.m.)											
			1600		2000		2400		2800		3200		3600	
 510	.340	3	433	7.74	569	9.67	705	11.6	841	13.5	977	15.5	1113	17.4
		6	387	15.5	523	19.4	659	23.2	795	27.1	931	30.9	1067	34.8
		9	351	23.2	487	29.0	623	34.8	759	40.6	895	46.4	1031	52.2
		12	321	30.9	457	38.7	593	46.4	729	54.1	865	61.9	1001	69.6
		15					567	58.0	703	67.7	839	77.4	975	87.0
 614	.685	3	882	15.6	1156	19.5	1430	23.4	1704	27.3	1978	31.1	2252	35.0
		6	794	31.2	1068	39.0	1342	46.8	1616	54.5	1890	62.1		
		9	726	46.8	726	58.4	1274	70.1	1548	81.8	1822	93.2		
		12	669	62.3	943	77.9	1217	93.5	1491	109	1765	124.3		
		15	618	77.9	892	97.4	1166	117	1440	136	1714	155.3		

*Due to continuous product development, specifications are subject to change without notice.



1314 Drop Thru Airlock Package

SRT Positive Displacement Blower

CAPACITY SPECIFICATIONS

Model	Motor hp/phase	Blower model/cfm	Airlock model	Line Size	Capacity*	
					bushels/hr	tonnes/hr
4510UV10-1PC	10 / 1	510 / 450	1210	4" (100mm)	524	13.3
4510UV15-1PC	15 / 1	510 / 500	1210	4" (100mm)	689	17.5
4510UV20-1PC	20 / 3	510 / 650	1210	4" (100mm)	827	21
4510UV10	10 / 1	510 / 500	1314	4" (100mm)	524	13.3
4510UV20	20 / 3	510 / 650	1314	4" (100mm)	827	21
5510UV30	30 / 3	510 / 800	1314	5" (125mm)	1153	29.3
5614UV40	40 / 3	614 / 900	1314	5" (125mm)	1366	34.7
5614UV50	50 / 3	614 / 1050	1314	5" (125mm)	1575	40
6614UV60	60 / 3	614 / 1200	1618	6" (150mm)	1890	48
6614UV75	75 / 3	614 / 1400	1618	6" (150mm)	2205	56
7614UV100	100 / 3	614 / 2000	2018	7" (178mm)	2953	75

*Capacities based on moving dry corn approximately 100' (30.4m). Barometric pressure, humidity, and condition of product will affect capacity. Due to continuous product development, specifications are subject to change without notice.


BUILT TO WITHSTAND THE ELEMENTS

It's all in the details, details like welded heavy-duty steel platforms that not only keep the elements away from moving parts, they are designed with integrated forklift pockets for portability when desired and built to last.

MINIMIZE DAMAGE MINIMIZE DUST NO AUGERS




Blower Package

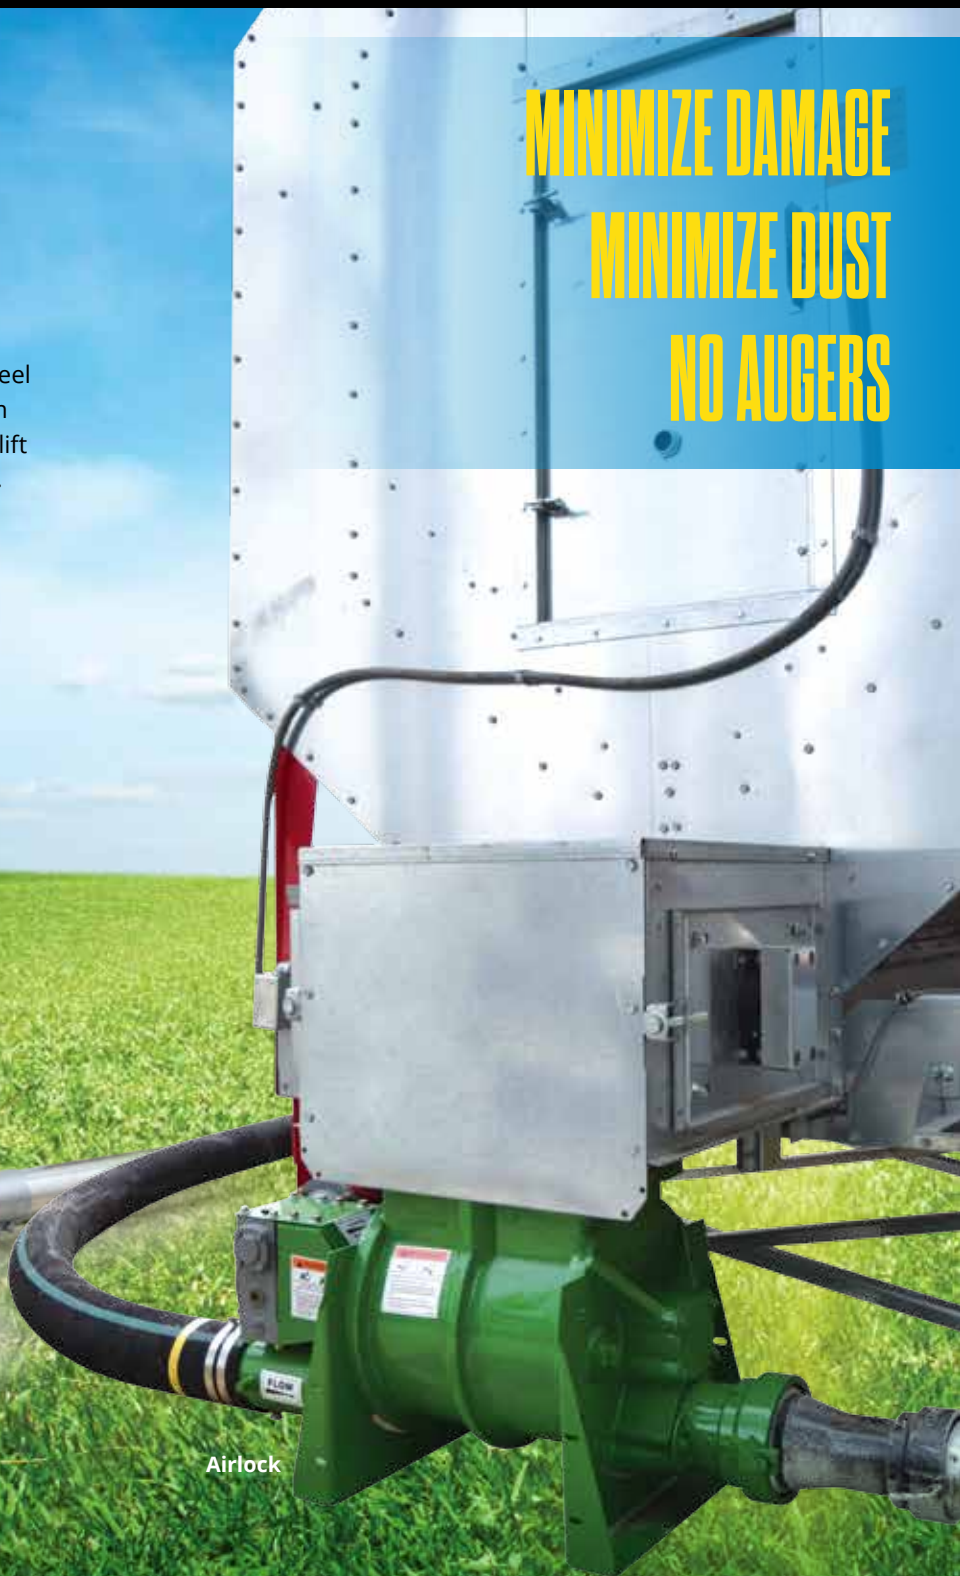

Airlock

WALINGA.COM



Head Office

R.R. #5,
Guelph, Ontario
Canada N1H 6J2
Tel: 519.824.8520
Tel: 888.925.4642
Fax: 519.824.5651

Michigan

1190 Electric Ave.
Wayland, Michigan
USA 49348
Tel: 616.877.3470
Tel: 800.466.1197
Fax: 616.877.3474

Manitoba

70 3rd Ave. N.E.
Box 1790
Carman, Manitoba
Canada R0G 0J0
Tel: 204.745.2951
Fax: 204.745.6309

Ontario

938 Glengarry Cres.
Fergus, Ontario
Canada N1M 2W6
Tel: 519.787.VACS (8227)
Fax: 519.787.8210